

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

WO 99/44165 (51) International Patent Classification 6: (11) International Publication Number: A1 G06F 17/60, H04M 17/00, 1/64 (43) International Publication Date: 2 September 1999 (02.09.99)

PCT/US99/04132 (21) International Application Number:

(22) International Filing Date: 25 February 1999 (25.02.99)

US

(30) Priority Data: 60/075.872 25 February 1998 (25.02.98) 09/256,540 24 February 1999 (24.02.99) US

(71) Applicant: E-LYSIUM TRANSACTION SYSTEMS INC. [US/US]; Suite 900, 444 Brickell Avenue, Miami, FL 33131 (US)

(72) Inventors: BASER, Caroline; 1512 S.W. 5th Street, Ft. Lauderdale, FL 33312 (US). GOROSTIS, Oliver; 9, rue d'Auvergne, F-50130 Octeville (FR).

(74) Agents: POSA, John, G. et al.; Gifford, Krass, Groh, Sprinkle, Anderson & Citkowski, PC, Suite 400, 280 N. Old Woodward Avenue, Birmingham, MI 48009 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL. TJ. TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: ELECTRONIC COMMERCE METHODS AND APPARATUS

(57) Abstract

object-oriented, An distributed architecture provides a suite of applications supporting pre-paid electronic commerce on Internet, Intranet or Extranet, including roaming transactions and transaction shipping involving more complex configurations. An input device (ID) is employed for receiving a request for a service from an end-user. The transaction manager (TM) requests the rating device (RD) to determine whether or not the transaction can take place given the remaining balance. If the user's balance is sufficient, the service device (SD) proceeds the transaction, rendering the requested service. The account device (AD) updates the user's remaining balance. A transaction data record is queued to the output device (OD). A typical roaming situation involves two transaction servers, called TxS devices. The first TxS device holds the input device (ID) and the service device (SD). The second TxS device holds the universal account device (AD) and the output device (OD).



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Annenia	FI	Pinland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdoni	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL,	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

WO 99/44165 PCT/US99/04132

ELECTRONIC COMMERCE METHODS AND APPARATUS

Field of the Invention

This invention relates generally to electronic commerce and, in particular, to an object-oriented, distributed architecture providing a suite of applications for implementing prepaid e-commerce in internet, intranet, and extranet environments

Background of the Invention

Although a precise definition has yet to be adopted, electronic commerce or e-commerce, as it is called, generally means the process of conducting business transactions via networked computers, whether through direct connections or over the internet. Regardless of the definition, e-commerce includes various business-to-business transactions, including many on-line retail and financial processes.

The trend toward e-commerce began some 25 years ago, when larger corporations began transacting business with subsidiaries and suppliers over private networks.

Recently, e-commerce has become more synonymous with 20 business carried out over the internet, through webs sites, for example, to sell goods, services, and information to consumers

Reliability, security and privacy remain concerns
with regard to conducting business over the internet.

25 Being packet-switched, internet messages typically move
through various computers before arriving at a final

destination, raising the potential for unauthorized interception. Existing architectures that depend upon internet protocols or e-mail communications therefore generally employ encryption schemes to enhance security.

5 Other approaches address such problems through direct links to commercial banking networks, which often require users to open and maintain an account.

Generally speaking, most existing approaches to
e-commerce rely on encryption involving the distribution of
10 public or private encryption keys, which, in turn, requires
measures to ensure that the keys are not lost or stolen.

Existing techniques also present problems in terms of network comparability. Telephony platforms based upon voice communications use switched networks, whereas 15 the internet relies on packet routing. Whereas the switched network is based upon establishing a physical link, the internet routes packets from node-to-node to establish a communication. There is concern among internet users that the source and destination addresses are, 20 themselves, not secure and subject to hacking activities.

Prior-art approaches to e-commerce generally use a hybrid configuration involving both switched and packet routing. A dial-up connection is used to gain access to the internet, for example. This hybrid approach generally does not yield the best of both worlds, however, since encryption keys must still be used with source and destination addresses subject to unauthorized tampering. The need still remains, therefore, for a pure e-commerce

- 3 -

solution, preferably one which permits different kinds of transactions to occur through a consistent architecture.

Summary of the Invention

The subject invention resides in electronic

commerce systems and processes, particularly with respect
to the processing of pre-paid transactions. The invention
is specifically directed to an object-oriented, distributed
architecture providing a suite of applications in support
of electronic commerce through web service platforms on the
internet or other points of sale, including intranet and
extranet environments. The invention is not limited by the
size of the transactions, and takes into account
micropayments of the type which might otherwise be
economically impractical through credit-card purchases.

A method of performing a pre-paid electroniccommerce transaction includes the steps of receiving a
service request from a user, and creating a transaction
instance. Information relating to the user's PIN and
remaining balance are retrieved to determine whether or not
the transaction can take place given the user's remaining
balance and, if the user's PIN is sufficiently funded, the
transaction proceeds, rendering the requested service. An
unrated service data record is returned, and the price of
the goods or services is calculated based upon the service
data record. The PIN balance is updated, and a transaction
data record is generated.

Five device components are preferably employed to

complete a transaction, thus enabling any transaction server (TxStm) to be local or remote. A preferred system for carrying out electronic commerce in accordance with the invention includes the following components, the operations 5 of which are coordinated by a transaction manager: an input device, an account device, a rating device, a service device, and an output device.

The input device is employed for receiving a request for a service from an end-user through a business 10 application, forming part of an internet web page, for example, or through the use of a virtual device called the Payment Portal tm. The Payment Portal may be viewed as an expandable widget/icon which resides independently on any web browser/page. When selected the widget/icon is 15 activated on the WEB page being viewed, allowing the end user to select the payment method, enter into a secure mode and then, if prepaid is selected, enter a debit account number (PIN) and a password in the fields provided for access to the prepaid account.

The account device performs account-management functions, including PIN verification operations. rating device is used to calculate the purchase price associated with the service to be provided, as when purchasing time for multi-user games, downloading newspaper 25 articles, etc. The service device actually provides the service. The output device for maintains transaction data record (TDR) queues accessible through a business application.

20

Through transaction shipment, an end user of the invention is not limited by geographic or national boundaries. Such roaming enables the end user to travel outside of a home location to an access point such as a web service platform on the internet or intranet/extranet/point-of-sale terminal in a country or region different from the one in which they normally receive service.

A typical roaming situation involves two TxS' of devices. The first device, identified as a foreign TxS, is the place where the end user initiates the transaction. The second device, identified as the home TxS, holds the business information for the pre-paid account. It is the home device which is associated with a TxS that holds the PIN business information.

The foreign TxS receives the end-user request and renders the service, once the PIN balance has been checked. The home TxS is requested by the foreign TxS to retrieve the PIN balance, perform the rating, and update the 20 account. The nature of the distributed architecture enables roaming to be performed without any PIN data replication, thereby eliminating data inaccuracy and consistency issues.

The use of transaction shipment is not restricted

25 to a typical roaming situation, but also applies to more

complex roaming situations. For example, in a 3-TxS

roaming situation, TxS#1 captures the request (ID) and

services the requests (SD); TxS#2 holds the universal

- 6 -

account device (AD) and the output device (OD); and TxS#3 holds the rating modules (RD).

Brief Description of the Drawings

FIGURE 1 is a drawing of a four-layer 5 architecture according to the invention;

FIGURE 2 is a drawing of a business model according to the invention including five components coordinated by a transaction manager;

FIGURE 3 illustrates different transaction steps
10 associated with a pre-paid electronic commerce example;

FIGURE 4 illustrates the transaction of Figure 3 in the form of a flow diagram;

FIGURE 5 illustrates a typical roaming situation involves two transaction server devices;

15 FIGURE 6 illustrates a transaction shipment according to the invention;

FIGURE 7 depicts a roaming situation utilizing three transaction server devices:

FIGURE 8 illustrates an example using a pre-paid
20 service from an HTML Web Page;

FIGURE 9 is a diagram which shows how an end user may enter order information in through an HTML page;

FIGURE 10 is a portion of an HTML page which
contains a form whose action property invokes
25 CorbaCqiServlet.doGet;

FIGURE 11 provides a simplified code sample of CorbaCgiServlet;

- 7 -

FIGURE 12 illustrates important transaction steps associated with a web service example;

FIGURE 13 shows how, if more sophisticated features are required on the client side, the service HTML page can include references to embedded Java applets;

FIGURE 14 is a UAD Entity Relationship Diagram based on a simple, two-entity model;

FIGURE 15 represents a JAVA application and JAVA installation according to the invention;

10 FIGURE 16 illustrates X/Open and OTS interfaces with respect to a credit/debit example according to the invention;

FIGURE 17 is a UML diagram which depicts a transaction inheritance tree;

15 FIGURE 18 is a UML diagram which depicts a transaction data record;

FIGURE 19 is a UML diagram which depicts the transaction server and devices according to the invention;

FIGURE 20 is a UML diagram which depicts requests 20 and transaction creation; and

FIGURE 21 is a UML diagram which depicts object interaction for the transaction shipments that occur in the typical roaming situation.

Detailed Description of the Invention

25 This invention resides in electronic commerce systems and processes, particularly with respect to the processing of pre-paid transactions. The invention is

specifically directed to an object-oriented, distributed architecture providing a suite of applications in support of true electronic commerce, as might be implemented through various wide- and local-area network service 5 platforms or other points of sale (POS), including smart devices such as a PDA (Personal Digital Assistant), or virtual devices such as the Payment Portal tm described in further detail below. Although specific examples will make reference to the internet, one of skill in the 10 art of distributed transaction processing will recognize that the invention is equally applicable to intranet and extranet environments. Nor is the invention limited by the size of the transactions, and takes into account micropayments of the type which might otherwise be 15 economically impractical through credit-card purchases.

In a preferred embodiment the invention uses a consistent four-layer architecture as shown in Figure 1.

Broadly, the architecture integrates a business application suite to an enterprise node called the transaction server 20 (TxStm), in such a way that transactions may be executed in a fully distributed mode. That is, a transaction initiated on one node may involve other nodes in order to be completed.

The top layer of the architecture is the business
application level which pulls transaction records from the
TxS and performs back-office operations. The TxS engine
layer manages pre-paid distributed transactions. The TxS
engine is free of vendor-specific features, and has an open

architecture, in that pre-paid accounts can be initially set up by an existing debit platform vendor's software, then later used for other kinds of pre-paid services through the TxS.

The device encapsulation layer enables a vendor platform or a server/device to interface with the TxS. The TxS interface defines a set of operations allowing distributed transactions. This layer is platform specific, in that interfaces must be written every time one integrates with a new type of service platform. However, since all WEB servers comply with standard interface specifications, this layer has already been implemented. The bottom layer is the service platform layer, which may function as a web server, point of sale, PDA, or other smart device.

The TxS engine defines interfaces for CORBA (Common Object Request Broker Architecture) services, and each service has a corresponding set of operations. Once a service has been made available, any of its operations 20 can be requested over the network. Integrating a service platform with the TxS also implements its related interfaces. With respect to prepaid telephony, the TxS does not execute any debit functions or call processing. The TxS performs all debit processing steps as a pure 25 e-commerce server solution for prepaid payments over internet/intranet/extranet.

As shown in Figure 2, the TxS business model consists of five components whose coordination is ensured

5

by a transaction manager (TM). These components are:

- The input device through which end-user requests are received, as through a web page or virtual device forming part of a web-enabled service.
- The account device which is responsible for carrying out lock, read and update PIN operations.
 - The rating device, which calculates purchase price of goods and services for the end-user.
- The service device, which renders the actual
 service, such as connecting multiple parties through a TCP/IP connection.
- 5. The output device, which maintains multiple transaction data record (TDR) queues available for the business application. The TxS engine defines interfaces for creating CORBA services, such that each service owns a set of operations. Once a service has been made available, any operation can be requested across the network.

Payment Portal ta

In terms of the input device, the Payment Portal

20 is one the techniques that the TxS may use for making
network payments for products or services with a prepaid
payment method using a debit account (or with a post-paid
payment method associated with a credit card number). The
Payment Portal may be viewed as an expandable widget/icon

25 which resides independently on any web browser/page. When
selected, the widget/icon will expand on the WEB page being
viewed, allowing the end user to select the payment method,

enter into a secure mode and then, if prepaid is selected, enter a debit account number (PIN) and a password in the fields provided.

The web page requesting payment will pass account

5 device location and rate device location information to the
Payment Portal. If a prepaid method is being used, the
authorization of the account can be executed. If a
purchase is authorized, the account decrementation can be
accomplished at the account device specified. The final
10 balance after the purchase will be shown in the Payment

A history of payments can be provided to the end user. In case of an estimate of the item's price, the rate device specified can be used to calculate the price without 15 a purchase being made or without sufficient funds being available. The results are shown to the user in the Payment Portal's user interface.

Another use of the Payment Portal will be to top off (i.e., reload) any prepaid account balance at the specified account device with a credit card or through a home banking application where the end user can move some amount of money from a bank or credit card account to the prepaid account.

PRE-PAID E-COMMERCE TRANSACTIONS

By way of a review, the transaction server or TXS is an e-commerce server that can be used for various types of pre-paid services, including pre-paid services on the

25

Internet. With its account service, the TxS provides debit account management services, including account authorization, debiting and updating. Figures 3 and 4 illustrate the different transaction steps associated with 5 a pre-paid electronic commerce example. Referring first to Figure 3, the primary steps are as follows:

- Incoming request
- 10 3. PIN authorization, lock and remaining balance retrieval
 - 4. The TM requests the RD to determine whether or not the transaction can take place, given the remaining balance.
- 15 5. If the PIN is sufficiently funded, the transaction manager requests the service device to proceed with the transaction.
 - 6. Service platform renders the requested service (for example, placing an order).
- 20 7. The service device returns a raw (not rated) service data record (SDR).
 - 8. The raw SDR is handed over to the rating device in order to calculate the cost of the transaction (ie, the purchase price of the goods or services).
- 25 9. The transaction manager requests the account device to update the PIN balance and unlock the PIN.
 - 10. A TDR is queued to the output device
 - 11. The business application retrieves the TDR.

- 13 -

Figure 4 illustrates the transaction in the form of a flow diagram.

TYPICAL ROAMING SITUATION (TRS)

As discussed above, five device components are

5 preferably employed to complete a transaction, thereby
enabling any TxS device to be local or remote. Roaming
provides the ability for any end-user to travel outside of
their home location by a local access point (for example,
a POS) in a country or region different from the one in

10 which they normally receive service. An end-user is not
limited by geographic or national boundaries. Roaming
creates a global system for end users.

Figures 5 illustrates a typical roaming situation involves two TxS devices. The first device, identified as 15 a foreign TxS, is the place where the end user initiates the transaction. The second device, identified as the home TxS, holds the business information for the pre-paid account. This platform is associated with a TxS that holds the PIN business information. The foreign TxS receives the 20 end user request and renders the service once the PIN balance has been checked. The home TxS is requested by the foreign TxS to retrieve the PIN balance, to perform the rating and update the account. All the transaction steps are executed. The rating device and the account device 25 operations are executed on a remote TxS. Note that the distributed architecture enables roaming to be performed without any PIN data replication, thereby eliminating data

inaccuracy and consistency issues.

Two transaction managers are involved in the roaming situation just described. The transaction keeps running on one node as long as transaction steps can be executed locally. The transaction ships to another TxS node if a transaction step cannot be executed locally.

TRANSACTION SHIPMENT FOR TYPICAL ROAMING SITUATION

- It is important that it should only take two
 messages back and forth to carry out a TRS transaction.

 This is achieved with transaction shipment, as shown in
 Figure 6. In order to minimize the number of CORBA
 messages, a transaction keeps running on a TxS node as long
 as its local devices can service the request. The
 transaction ships to another TxS as soon as an operation
 (i.e., a transaction step) cannot be performed locally.
 Transaction shipment is of course not restricted to TRS
 transactions. It actually applies to all roaming
 situations. Figure 7 depicts a 3-TxS roaming situation,
 wherein:
- TxS#1 captures the request (ID) and services the requests (SD),
 - 2. Txs#2 holds the universal account device (AD) and the output device (OD), and
 - 3. TxS#3 holds the rating modules (RD).

25 WEB SERVICE PLATFORM EXAMPLE

The following section describes an example using

a pre-paid service from an HTML Web Page, as depicted in Figure 8. This application would be useful, for example, for placing any kind of order from a WEB browser. This embodiment implements an input device that allows the 5 end-user to enter a pre-paid transaction request from an HTML page. The primary goal of this integration is to deliver the end-user request to the TxS. Being a true e-commerce transaction, the account device need not be specific, allowing a basic universal account device to be 10 used in this implementation. The account device may even be an account device previously used for another kind of service.

A specific rating device must be implemented, since parameters entered from the WEB page will be used to calculate the price of the goods or services purchased. For example, in a pizza ordering service, the end user chooses a pizza size and the toppings. These are quantifiable parameters used for calculating the pizza price. Discounts, club points, promotions and other sales methods can also be part of the rating model used. The service device takes care of placing the actual order. It might consist of writing a record in a database, or for example, sending a fax to the fulfillment center.

In this particular example, the input device may

25 include a CORBA servlet that can be requested from any
network node. The end user enters the order information in
the HTML page, as shown in Figure 9. When the end user
submits its request, the HTTP Servlet DoGet method is

- 16 -

invoked. The DoGet method locates and requests the CORBA Server.

The order entered on the Web page is eventually stored in a database by the service device. The orders placed in a database can be processed by an external application. The implementation comprises the following elements:

Web Server:

Any Web Server.

10 Input Device:

This component is an Input Device Implementation created from the MTG CORBA interface tmg.engine.InputDevice.

OrderServer:

CORBA service object associated with the Input Device. It
is used by the Web Server to send an End User Request to
the TxS. The Input Device creates the CORBA Server
instance. The Order Server is a registered CORBA service
whose name is "OrderServer" and that was created from the
CORBA interface tools.web.CorbaCgilnterface.

20 CorbaCqiServlet:

Tools.web.CorbaCgiServlet extends
javax.servlet.http.HtrtpServlet. Its DoGet method is
called when the user submits their page to the HTTP Server.
The CorbaCqiServlet is a CORBA client of the Order Server.

The HTML page contains a form whose "action" property invokes CorbaCgiServlet.doGet. It also has a property which gives the name of the OrderServer CORBA service, as shown in Figure 10. The CorbaCgiServlet, 5 shown in the paragraph of Figure 11, provides a simplified code sample of CorbaCgiServlet. The doGet method retrieves the AdsServer name from the HTTP Request parameters and locates the corresponding CORBA service. The doGet method uses the servlet output stream to return a dynamically built HTML page.

Transactions Steps (Figure 12)

- O The end-user submits the page to the Web
 Server. The HTTP request contains all the data entered by
 the end user (Prefix, PIN number, Order Description). The
 15 Do Get method of the Servlet is called.
- 1 The DoGet Method locates the CORBA Order
 Servlet associated with the input device and calls its
 "exec" method with the end user request as a parameter.
 The order servlet places the request in the input device
 20 queue. The "exec" method is synchronous, and waits until
 the end of the transaction.
 - $\ensuremath{\mathtt{Z}}$. The transaction manager reads the ID queue and creates a transaction instance.
- 3 PIN authorization, lock and remaining
 - 4 The TM requests the rating device to calculate the price of the goods or services purchased.

- 5 If the PIN is sufficiently funded, the transaction manager requests the service device to proceed with the transaction.
 - 6 Create a new order in the orders database.
- 5 7 The order has been created and the service device returns a service data record
 - 8 Unlike telephony, the rating operation for ordering a physical item here is a void one, since the purchase price is known before the transaction has ended.
- 10 However, for services that are metered, such as, interactive games and chat encounters, the rating will be done in real-time as the transaction is on-going.
- 9 The transaction manager requests the account device to update the PIN balance and unlock the PIN. A TDR 15 is created and placed in one of the transaction manager queue.
 - 10 The order server "exec" dynamically creates an HTML response page depending on the transaction outcome and then returns it to the CorbaCqiServlet.
- 20 11 The CorbaCgiServlet prints the dynamically created page into its output stream. The page is then displayed in the end user's Web browser.

Alternative Architecture (Figure 13)

The Web Service architecture described above uses
25 plain HTML pages that do not contain downloadable applets.
A servlet is used for establishing communication with the
TxS and this servlet is a client of the CORBA Order Server.

If more sophisticated features are required on the Client side, the service HTML page can include references to embedded Java applets. In this architecture, shown in Figure 13, the applet is the Client of the CORBA Order 5 Server.

The Java client typically interacts with the server as follows:

- ${\scriptsize \hbox{1.}} \quad {\scriptsize \hbox{Web}} \quad {\scriptsize \hbox{Browser}} \quad {\scriptsize \hbox{downloads}} \quad {\scriptsize \hbox{HTML}} \quad {\scriptsize \hbox{page}} \quad {\scriptsize \hbox{that}} \\ {\scriptsize \hbox{includes JAVA applets references}}.$
- 10 2. Web Browser retrieves JAVA applet from HTTP Server.
 - The Java virtual machine embedded in Web Browser loads the applet and starts it.
- The applet is now running on the client and
 invokes the Order Server using CORBA.

Universal Account Device (Figure 14)

The Universal Account Device, or UAD, is a PIN database that can be used for any pre-paid service. The UAD implementation preferably uses Oracle 8.0. The UAD 20 Entity Relationship Diagram is based on a very simple, two-entity model, as shown in Figure 14. Simultaneous pre-paid transactions using the same account is possible as long as business rules are well defined. The introduction of such business rules allowing simultaneous use can be 25 described as Soft Locking versus Hard Locking that locks out anyone else when the pre-paid account is being used.

Output Device

The output device is the counterpart to the input device, in the sense that it is in charge of managing the TDR after transactions have taken place; namely, queuing, pull interface for the business application, and so forth. The output device also supports multiple transactions queues and multiple client TDR retrieval.

JAVA Applications

As shown in Figure 15, JAVA applications
10 preferably use the J'Express 3.0 Full Java installation
product, which includes:

- · The TransactionServer
- · The OnLineDecisionSystem
- · The RealTimeEngine

15 Fault Tolerance

Fault tolerance is required for the TxS Trader and for each TxS node. Visibroker provides fault tolerance by starting instances on multiple hosts. If a client is connected to an object implementation, and the connection is lost, the Visibroker Smart Agent detects the loss and automatically reconnects the client to another instance. However, Trader and TxS are object implementations that maintain states, which means that a lost connection will not be transparent to the client. Visibroker provides events' handler mechanisms to bring the state of a replica implementation up to date.

Load Balancing

With Load Balancing, requests can be automatically routed to different servers so as to dynamically balancing the request load. Visibroker uses 5 Smart Stubs to provide load balancing (The smart stub invokes the least loaded of several equivalent remote objects).

Administration GUI

First stage is a simple administration GUI that

10 enables an administrator to change device configurations without bringing down the TxS. This mainly includes add/
remove programs/prefixes to and from a TxS. At the present time, TxS devices are preferably loaded from a file at start up time and cannot be changed unless a TxS shutdown

15 is performed. Second stage will include a slicker interface intended for commercial use (i.e., device graphical representations, additional information supervision information).

SNMP Agent

- 20 The SNMP agent (e.g., Java Advent) provides an interface to a manager application so that the TxS can be supervised and monitored. This interface preferably contains:
- A set of variables that facilitates monitoring
 (the manager can invoke set and get operations for these variables),

WO 99/44165 PCT/US99/04132

- 22 -

 A set of Trap messages (these messages can be sent to the manager upon detection of an abnormal condition or for example when a variable goes above or beyond a pre-defined threshold).

5 Counter Agent

15

The motivation behind the counter agent is a licensing policy based on transaction volume and number of occurrences. For example, a license fee might be paid for the first 10 million transactions, with upgrade fees being required if a predefined threshold is exceeded. A counter agent will manage transaction counting. If invoked, the counter agent will have the ability to shut down the TxS upon reaching a predetermined threshold limit.

OTS Interfaces and X/OPEN Mapping

- Figure 16 illustrates X/Open and OTS Interfaces with respect to a credit/debit example. The main OTS interfaces are:
- Current is a CORBA pseudo object that makes it easy for clients to use OTS. Clients invoke begin and 20 commit operations.
- 2. Coordinator is implemented by the transaction service. Recoverable objects use it to coordinate their participation in the transaction. Phase#1 occurs when the coordinator asks each participant to vote (prepare 25 operation). If all participants agree, coordinator performs phase#2 (asks all participants to commit).

- 23 -

 Resource: recoverable server object participating in a two-phase commit (Prepare operation is the vote)

Transaction Management and Transaction Shipping

The objective of transaction shipping is to minimize

5 the number of CORBA messages in roaming situations. In a
roaming situation, a transaction ships or travels from one
TXS to another. Therefore, it globally consists of
consecutive run sequences executed on different TXS
devices. The global transaction can also be seen as an
10 execution path: The same TXS may of course appear several
times in an execution path but two adjacent TXS are
necessarily different.

A run sequence consists of several operations. The outcome of one operation determines what the next operation 15 is. The transaction ships if the next operation cannot be executed locally.

A TXS knows what its own capabilities are (they are loaded from the TXS devices file at start time or updated via the administration GUI application). A transaction 20 thread can determine at any time from end user request properties if a local device can perform the next operation or if shipment needs to occur.

Each TXS caches the other TXS it establishes communication with. TxS-to-TxS communication mainly occurs
25 for shipping transactions. When a TXS needs to ship a transaction to another TXS, it first looks it up in its TXS cache. The alternative is:

- The looked-up TxS is not found in the cache. It asks the trader the name of the TxS that can perform the operation, gets a reference to that TxS (CORBA bind), caches the reference and ships the transaction, and
- 5 2. The looked-up TxS is found in the cache. The TxS just uses the cached remote reference (with no preparatory ping!) and tries to ship the transaction. If the first shipping attempt fails, that means the cached reference is obsolete. The obsolete reference is removed from the cache and the TxS does as if the reference had not been found in the cache in the first place.

DESIGN DIAGRAMS

This section of the description provides further details of the technical design utilizing the UML notation.

15 Class diagrams will first be presented, followed by a TRS interaction diagram for the shipments which occur in a typical roaming situation.

CLASS DIAGRAMS

20 Transaction Inheritance Tree (Figure 17)

The TxS is capable of dealing with different business models. Each transaction sub-class matches a business model (e.g.: pre-paid, post-paid, and so forth), containing all the behaviors required for implementing that model.

25 Each transaction is a sequence of operations whose execution order is coded in each subclass. Upon

- 25 -

termination of an operation (or transaction step), the sub-class analyzes its outcome and decides what the next one will be and if a shipment needs to occur. The transaction super-class holds necessary information for general transaction management (transaction state, reference to the local TxS, next operation to be executed, etc.)

Transaction Data Record (Figure 18)

The TDR aggregates all the information that pertains

10 to a transaction. It consists of three data groups:

- ${\tt 1.} \quad {\tt General:} \quad {\tt Identification,} \quad {\tt State,} \quad {\tt Begin} \quad {\tt and} \quad {\tt End} \\ {\tt Time \ Dates} \quad$
- End User Request: Origin, Type (the kind of transaction that is requested: pre-paid, post-paid, etc...
 PIN, Prefix; and
 - Service Data Request: Record return by the Service Device proceed call. Price, quantity, Additional properties specific to the service device.

As the transaction progresses and possibly travels

20 around, the TDR builds up. It is completed when the last
step of the transaction has been executed. The shippable
transaction class is only used for shipping. Its purpose
is to make shipments as small as possible. One needs to be
able to create a shippable transaction from a transaction

25 (at shipment time) and vice versa (upon receipt of a
shipped transaction). The shippable transaction only
consists of the next step to be executed and the TDR.

TxS and Devices (Figure 19)

The TxS class is the TxS engine. It is associated with device implementations through the five interfaces: input device, account device, rating device, service device 5 and output device. The role of the TxS devices is described elsewhere herein. The TxS engine manipulates its devices only through its interfaces and does not know about device implementations. Device implementation classes are chosen at start-up time. When a TxS starts up, its 10 advertises its responsibilities to the TxS Trader. The TxS uses the TxS Trader to locate other TxSs across the network.

Requests and Transaction Creation (Figure 20)

When an end user request or a shipped transaction
15 comes in, the TxS just hands it over to the transaction
manager that is in charge of creating the corresponding
transaction sub-class and starting a transaction thread.

The TxS uses the transaction manager through an interface.

- 20 The transaction manager uses the transaction creator through an interface. The transaction creator can carry out three different operations:
 - Turn an end user request into a transaction interface reference (a new request has come in)
- 25 2. Turn a shippable transaction into a transaction interface reference (a shipped transaction has come in)
 - 3. Turn a transaction interface reference into a

shippable transaction (a shipment needs to occur).

The transaction manager always manipulates transactions through the transaction interface and does not know anything about transaction subclasses. The only class that needs to know about transaction sub-classes is the transaction creator.

TRS Interaction

Figure 21 depicts object interaction for the transaction shipments that occur in the typical roaming 10 situation. In this example, the transaction is initiated on the foreign TxS and first ships on to home TxS to execute the following transactions steps:

AD.pinStatus,

AD.pinBalanceAndLock, and

15 RD.maxQuantity.

It then ships back to the Foreign TxS for proceeding with the service device. It ships again to Home TxS to execute:

RD.rate,

AD.pinDebit, and

20 OD.queueTdr.

We claim:

WO 99/44165 PCT/US99/04132

- 28 -

- A method of performing a pre-paid electronic-
- 2 commerce transaction for a user having a personal identification number (PIN), the method comprising the
- 4 steps of:

receiving a request for goods or services from the 6 user and creating a transaction instance;

retrieving account information relating to the user's

8 PIN, including the user's remaining balance;

determining whether or not the transaction can take

- 10 place as a function of the user's remaining balance;
- proceeding with the transaction and servicing the
- 14 calculating the purchase price of the requested goods or services based upon the service data record;
- 16 updating user's remaining balance; and generating or updating a transaction data record.
- $\begin{tabular}{lll} 2. & The method of claim 1, wherein the transaction \\ 2 & occurs over the internet. \\ \end{tabular}$
- The method of claim 1, wherein the transaction
 occurs over an intranet.
- The method of claim 1, wherein the transaction
 occurs over an extranet.
 - 5. The method of claim 1, wherein the request is

WO 99/44165 PCT/US99/04132

- 29 -

- 2 received through a point-of-sale (POS) terminal.
- $\mbox{6.} \quad \mbox{The method of claim 1, further including the step} \\ \mbox{2 of:} \quad \mbox{} \quad \mbox{}$
- denying further service requests when a predetermined
- 4 threshold is reached, thereby enforcing usage limits.
- The method of claim 1, wherein the input device
 forms part of a web page.
- The method of claim 1, wherein the input device
 is a virtual device.
- The method of claim 8, wherein the virtual device
 allows the user to:

select a pre-paid method of payment, and

- 4 enter the user's PIN and password.
- 10. The method of claim 1, wherein the step of 2 calculating the purchase price of the requested goods or services occurs in real time.
- The method of claim 10, wherein the purchase
 price is a dollar or less.
 - 12. The method of claim 1, wherein:
- 2 the steps associated with receiving the request from the user and servicing the request are performed at a first

4 location; and

one or more of the other steps are performed at one or 6 more different locations.

- 13. The method of claim 12, wherein one of the 2 different locations is associated with requesting a payment, and wherein that location passes accounting and 4 rating information to the first location.
- 14. The method of claim 1, further including the step 2 of providing the user with an estimated purchase price before a purchase is made.
- 15. The method of claim 1, further including the step 2 of providing the user with a history of payments.
- 16. The method of claim 1, further including the step 2 of allowing the user to move funds from a bank or credit card account to increase the remaining balance.
- The method of claim 1, wherein the input device
 forms part of a personal digital assistant.
- 18. An architecture facilitating e-commerce 2 transactions, comprising:
 - a) an input device for receiving a request for goods
- 4 or services from a user having a personal identification number (PIN);

WO 99/44165 PCT/US99/04132

- 31 -

- b) an account device for performing accountmanagement functions, including account balance and PIN 8 verification operations;
- c) a rating device for calculating the price of the 10 requested goods or services;
 - d) a service device for fulfilling the request;
- 12 e) an output device for maintaining one or more transaction data records; and
- 14 f) a transaction manager coordinating the operations of a) through e).
 - The architecture of claim 18, including
 transactions which occur over the internet.
 - 20. The architecture of claim 18, including transactions which occur over an intranet.
 - 21. The architecture of claim 18, including transactions which occur over an extranet.
 - 22. The architecture of claim 18, including transactions which originate at a point-of-sale (POS)
 - 23. The architecture of claim 18, wherein the input 2 device is an internet web page.
 - 24. The architecture of claim 23, wherein the virtual

WO 99/44165 PCT/US99/04132

- 32 -

- 2 device allows the user to:
 - select a pre-paid method of payment, and
- 4 enter the user's PIN and password.
- The architecture of claim 18, wherein at least
- 2 the rating device and the service device support micropayments.
- The architecture of claim 18, wherein the input
- 2 device and the service device are disposed at a first location, and one or more of the other devices are disposed
- 4 at one or more different locations.
- 27. The architecture of claim 18, wherein the rating
- 2 device is operative to provide the user with an estimated purchase price before a purchase is made.
- 28. The architecture of claim 18, wherein the input
- 2 device is operative to provide the user with a history of payments.
- The architecture of claim 18, wherein the output
- 2 device supports multiple service data record queues.
- 30. The architecture of claim 18, wherein the account
- 2 device is operative to move funds from a bank or credit card account to increase the remaining balance.

- 31. The architecture of claim 18, wherein the input 2 device forms part of a personal digital assistant.
- 32. A method of performing a pre-paid electronic-
- 2 commerce transaction, comprising the steps of:
 - a) providing the architecture of claim 18;
- b) receiving a request from a user through the input device;
- 6 c) creating a transaction instance through the transaction manager;
- 8 d) performing PIN authorization, lock and remaining balance retrieval through the account device;
- e) invoking the rating device to determine whether or not the transaction can take place given the user's remaining balance;
- f) proceeding with the transaction through the 14 service device if the PIN is sufficiently funded;
- g) fulfilling the request if the PIN is sufficiently 16 funded;
- h) returning an unrated service data record through18 the service device;
- i) calculating a purchase price using the rating
 20 device:
- j) updating the PIN balance and unlocking the PIN 22 using the account device; and
 - k) creating multiple TDR gueues.

Business Application		Business App Financial Billing Technical Support Customer Service	Clobal Data Warehouse Workflow 3-tier architecture
TxS	TxS	Transaction Processing • Transaction Integrity • Roaming	Vendor independent Distributed Scaleable Expandable State of the Art technology
Device Encapsulation	000	Device implementation • Platiom specific • Service specific • Placeholder for service platform integration	e ntation stform integration
Service Platform		Service Platform / Continuity - e-commerce Integration - Web Server - Talanhow Debit Platform Legacy issu	m Continuity Reuse of existing platforms Integration of new platforms Legacy issues respected

igure -

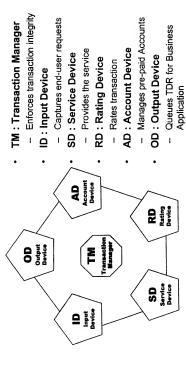


Figure - 2

WO 99/44165 PCT/US99/04132







Figure - 3



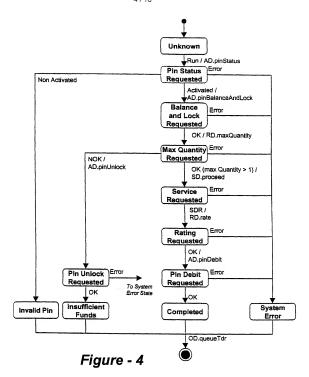


SUBSTITUTE SHEET (RULE 26)




SUBSTITUTE SHEET (RULE 26)

6 / 16





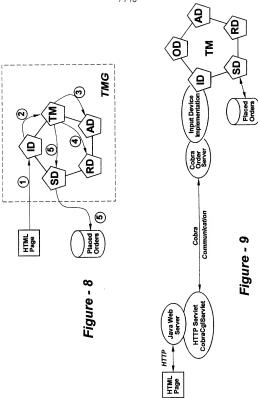

SUBSTITUTE SHEET (RULE 26)


8 / 16


```
<INPUT type=hidden name=CorbaCgiServerName value=OrderServer>
<FORM action="/servlet/CorbaCgiServlet" method="Get">
                                                                                                              </FORM>
```

Figure - 10

```
CorbaCgiInterfaceHelper.bind(tools.corba.CorbaUtil.orb(), serverName);
public void doGet(HttpServletRequest req, HttpServletResponse res)
                                                                                                                               String serverName = req.getParameter("CorbacgiServerName"); ServletOutputStream out = res.getOutputStream();
                                                                                                                                                                                                                                                                                                                                                                                          String output = server.exec(req.getQueryString());
res.setContentType("text/html");
                                                     throws ServletException, IOException
                                                                                                                                                                                                                                                               tools.web.CorbaCgiInterface server =
                                                                                                                                                                                                                                                                                                                                                                                                                                                                               out.println(output);
```

Figure - 11









Figure - 14



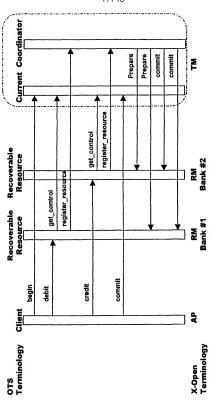


Figure - 16




Figure - 17




Figure - 18


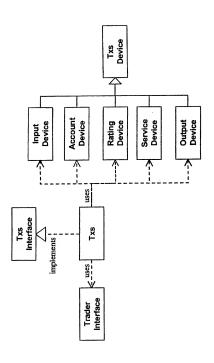


Figure - 19



WO 99/44165 PCT/US99/04132

15 / 16

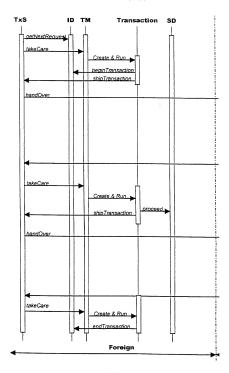


Figure - 21

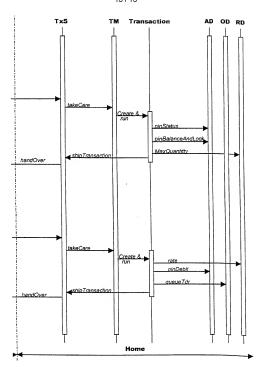


Figure - 21 (con't)